

MORE
STANDARD

HALSANG

FACTORY • LOGISTICS
INFRASTRUCTURE • TRANSPORT
PUBLIC SPACES • BUILDINGS

FENCING

DOUBLE BAR PANEL FENCES AND POSTS



ADVANTAGES

SAFE AND STURDY

The Double bar panel fence system for Industry, Sport, School, Kindergarten, and Public areas is a good and professional fence solution, offering a sturdy and secure solution around the perimeter.

HEAVY CONSTRUCTION

Heavy welded mesh panels with double horizontal wires and single vertical wires in HDG steel or alternatively in HDG + RAL powder coating.

COATING

Hot dip galvanized (EN ISO 1461).

Hot dip galvanized (EN ISO 1461) + RAL Polyester powder coating.


Standard RAL-Colors: RAL 6005 Moss green, RAL 9005 Jet black, RAL 7016 Anthracite grey (other RAL-colors on request).

Overview of different panel types (See technical description).

Post systems with several different profiles and connection systems available.

COMPLETE SYSTEM

In combination with the Halsang gate range of Speed folding gates, Sliding gates, Swing gates and Turnstiles you have a total solution for the sites perimeter protection and access control.

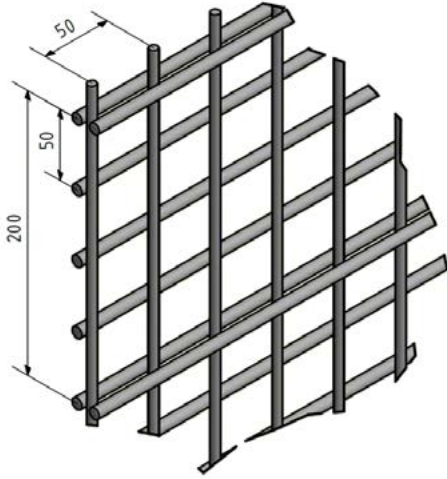

MESH 50X200 MM + 50X50 MM

TECHNICAL DESCRIPTION

DOUBLE BAR PANELS TYPE 8/6/8 (STANDARD)

Horizontal wires:	2x8 mm
Vertical wires:	1x6 mm
Mesh size:	50x200 mm
Panel heights:	630, 830, 1 030, 1 230, 1 430, 1 630, 1 830, 2 030, 2 230, 2 430mm
Panel width:	2 500 mm

DOUBLE BAR PANELS TYPE 6/5/6 (STANDARD)

Horizontal wires:	2x6 mm
Vertical wires:	1x5 mm
Mesh size:	50x200 mm
Panel heights:	630, 830, 1 030, 1 230, 1 430, 1 630, 1 830, 2 030, 2 230, 2 430 mm
Panel width:	2 500 mm

DOUBLE BAR PANELS TYPE 8/6/8 (MESH 50X200 MM + 50X50 MM)

Horizontal wires:	2x8 mm
Vertical wires:	1x6 mm
Mesh size:	50x200 mm + 50x50 mm on the front side of the panel
Panel heights:	Same as on Standard, Maximum 2 430 mm
Panel width:	2 500 mm

DOUBLE BAR PANELS TYPE 8/6/8 (ON REQUEST)

Horizontal wires:	2x8 mm
Vertical wires:	1x6 mm
Mesh size:	50x200 mm
Panel heights:	2 630, 2 830, 3 030 mm
Panel width:	2 400 mm

Panel height:	Same as on Standard, Maximum 2 430 mm
Maximum panel width:	3 000 mm





TYPE 1A



TYPE 1B



TYPE 2



TYPE 3

POSTS

Various different post types and profiles are available from stock in HDG, HDG + RAL powder coated, Magnelis or Magnelis + RAL powder coated.

Post profile sizes 50x50 mm, 60x60 mm, 70x70 mm, 60x40 mm, 80x40 mm, 100x40 mm and 120x40 mm (Other sizes on request)

Type 1A Undrilled post

The panels are connected to the posts with Stainless steel U-Connectors

Type 1B Undrilled post

The panels are connected to the posts with steel connectors and self drilling screws

Type 2 Post with Cover plate

Cover plate covering the full height of the panel. Panel holders either in Polyamide or Steel. Cover plate connected to the post with M8 bolts.

Type 3 Post with pre-drilled holes for Hook screws

Panels are connected to the posts with M8 hook screws and M8 brake off nuts. The panels are connected to each other with Stainless steel panel connectors.

OPTIONAL FOR PANELS ON REQUEST

- Other RAL colors
- Other panel sizes and mesh options
- Bended panels
- Other panel accessories

OPTIONAL FOR POSTS ON REQUEST

- Other RAL colors
- Other profile sizes and designs
- Posts with welded base plates
- Welded extension arms for barb wires (45° arm, Y-Arm)
- Separate base plates, extension arms
- Other post accessories

